



BUILT NOV. 1
OF LOADERS

PULLMAN-STANDARD ORDER NO. 8646
INSTALLER BY PULLMAN

WM SYSTEM CLASSIFICATION B-20

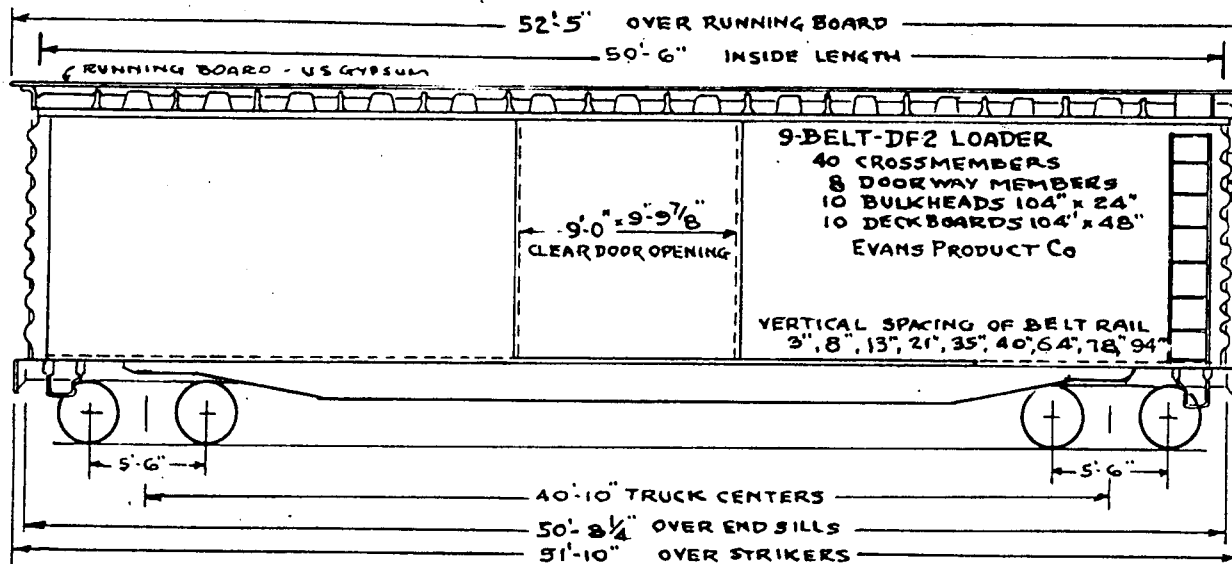

Box Cars No. 34076-... JB5
Class IML

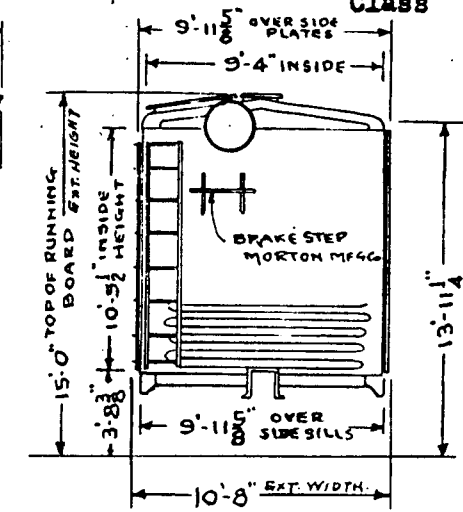

BARBER CUSHION TUBE .361 WALL 5 1/2" OD. - 809 LBS ALLOY

GENERAL

1. Capacity - Level 4932 cu.ft.	Nominal 110,000 lbs.
2. Load Limit	114,300 lbs.
3. Light Weight	62,700 lbs.
4. Maximum Load on Rails	177,000 lbs.

BODY

5. Framing - All welded, A.A.R. "2" - 41.2#	Center Sills
6. Side Sheets	All Welded .10 CB Steel
7. Doors	Type 47 Youngstown
8. Door Fixtures	Camel Sales Co.
9. Floor - 2 1/4 Y.P. Treated, 11'-0" "Doweloc"	at doorway
10. Roof - 14 ga. C.B. Steel Galvanized	Pullman
11. Ends - Bottom Section 5/16", Top Section 3/16"	Pullman
12. Side and End Ladders	Car Builders

DRAFT - Barber Cushion Tube 6 1/4" travel, Std. Car Truck

13. Draft Gear	RF-355 Miner
14. Draft Key and Retainers A.A.R.	Yoke A.A.R. Y-40
15. Coupler A.A.R. Type "E" - 25" shank	McConaloy

16. Coupler Centering with Coupler Height Adjust.	SREMCO.
17. Coupler Uncoupling Device "Standard"	SREMCO.
BRAKES	
18. Brake Schedule	"AB" WABCO
19. Brake Cylinders 4 - 7 1/2" dia.	Shoes V-141 Cobra
20. Brake Power	10.4% Gross Rail Load
21. Hand Brake (one truck only)	Universal
TRUCKS	
22. Frames	Narrow Pedestal - Arranged for Wabcopac
23. Snubbing Device Bolster Friction Blocks, Std. Car Truck	
24. Side Bearings	Single Roller No. 656-C Stucki
25. Brake Beam - Cast Steel	"Wabcopac" WABCO
26. Brake Levers and Bottom Connectors	WABCO
27. Axles	5 1/2" x 10" A.A.R. D-6-D
28. Wheels	A.A.R. D-33, Multiple Wear 33"
29. Roller Bearings with Heat Indicators AP 5 1/2" x 10"	Timken
30. Bearing Lubrication	A.A.R. "RB" Grease
31. Train Length Coupled	54'-11 1/2"