


1935-1 Company's Shop  
 SAND CARS X-1201 to X-1212 (1954)  
 SAND CARS X-1213 to X-1215 (1955)  
 SAND CARS 1575-1598 (1959)  
 SAND CARS 1600-1650

Covered Hopper Cars No. 500-509  
 Class 10

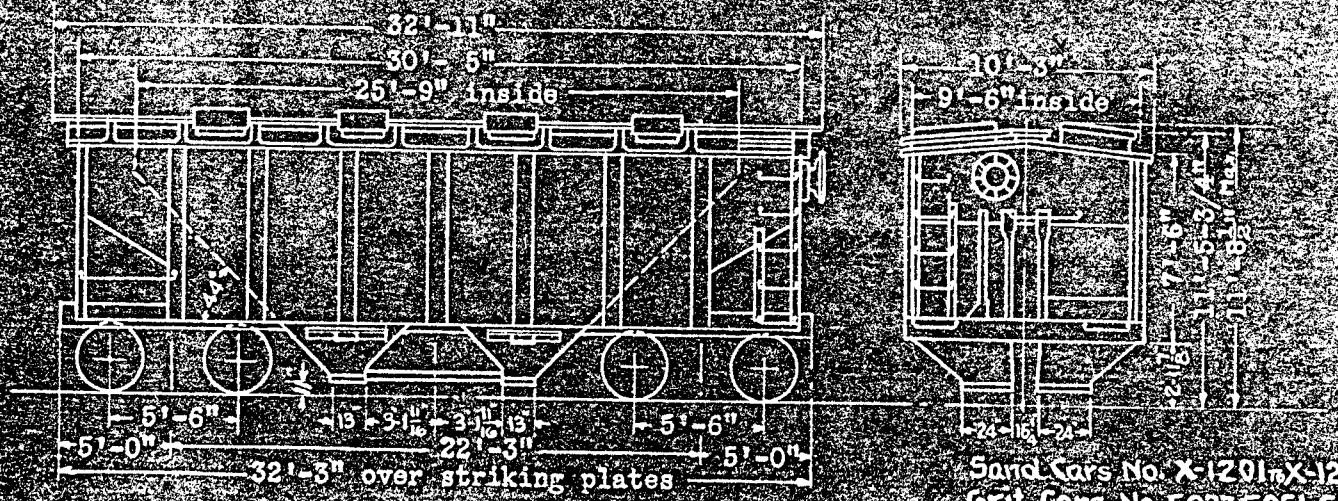

Sand Cars No. X-1201, X-1215  
 Grit Cars No. 5031, 5051, 5052, 5053, 5048

GENERAL		DRAFT (Continued)	
1. Capacity - level	1425 cu.ft.	Nominal	110,000 lbs.
2. Load limit			121,000 "
3. Light Weight			48,000 "
4. Maximum load on rails			169,000 "
BODY		14. Coupler centering device	
5. Framing - Underframe steel	Superstructure Steel	None	
6. Floor 1/4" steel, Sheathing 1/4" steel	St. Pockets None	15. Coupler uncoupling device	
DOORS		Imperial "B"	
7. Door operating device	Enterprise	AIR BRAKE	
8. Door opening	4 - 13" x 24"	16. Brake schedule	
ROOF		W.A.B. "AB" 10" x 12"	
9. Make	Hatch Opening 2' x 3' Hutchins Steel	17. Brake power	
10. Carlines - Make	Hutchins Steel	28,744 lbs.	
DRAFT		HAND BRAKE	
11. Draft Gear	Miner A-22-XB	18. Operating Device	
12. Draft attachments	Farlow two-key	Ajax 22" wheel	
13. Couplers	A.A.R. Type "E"	TRUCKS	
		19. Frame	
		Cast Steel	
		20. Dead Lever Fulcrum	
		Wine Brake Balancer	
		21. Side Bearing	
		Stucki	
		22. Lateral motion device	
		Barber	
		23. Snubber	
		Simplex Unit Type	
		24. Axles	
		A.A.R. 5 1/2" x 10"	
		25. Wheels	
		Cast Iron A.A.R. 33"	
		26. Brake beam auxiliary support	
		Single Economy - Craco	
		27. Train length coupled	
		34' 9"	