



CAR NOS.	4001-54007, 54911-54920	BUILT SEPT OCT 1951	HSCO ORDER NO. 07-154
LINE NO.	OCT. NOV. 1964	STAINING AND WELD FLOORS APPLIED	BLAINS
	DEC. 1964	WOOD FLOOR, FIXED ENDS APPLIED	
	MAR. 1965	"	"
	MAR. 1966	"	"
	MAR. 1967	"	"
	MAR. 1968	"	"
	SEPT. NOV. 1969	"	READING
	1971	"	"
	1971	"	BLAINS

GONDOLA CAR, MOD LINE NO.	8521-757
CLASS GB	"
"	2-55199-55170
"	2-55191-55205
"	4-55204-55211
"	5-55212-55220
"	6-55220-55241
"	7-55279-55237
"	8-55208-55203
"	9-55204-55275

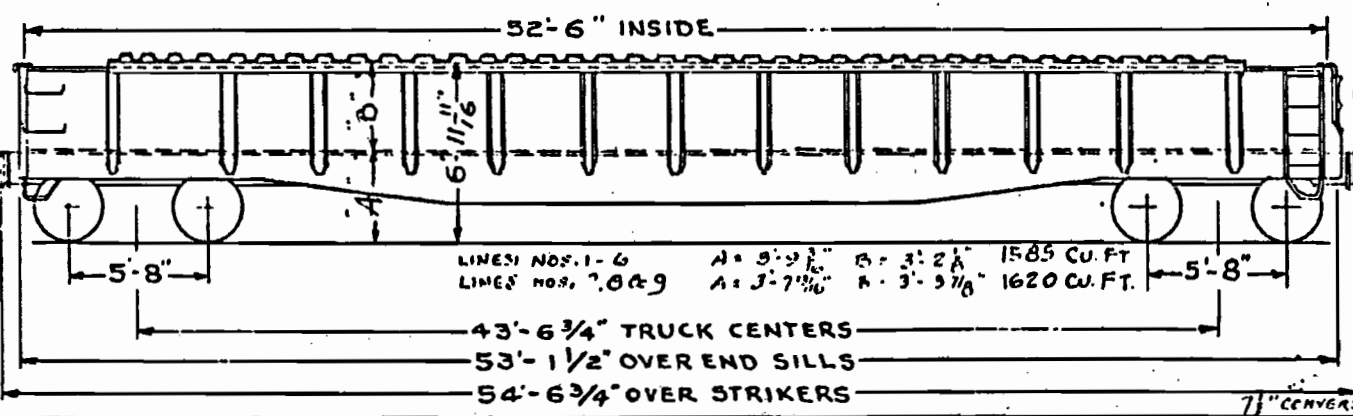

7 1/2" CONVERSION KIT, COMPOSITION SHEETS HAA LINE NOS. 2, 3, 4, 6, 7, 8, 9

GENERAL		DRAFT (Continued)	
1. Capacity	cu. ft. (SEE TABLE) Nominal 154,000 lbs.	16. Striker & Coupler Carrier with Coup. Ht. Adjust.	SREMCO
2. Load Limit	163,000 lbs.	17. Coupler Uncoupling Device	SREMCO
3. Light Weight	57,000 lbs.	BRAKE	Lines 6, 7, 8, 9 ABD Valve
4. Maximum Load on Rails	220,000 lbs.	18. Brake Schedule	WABCO "AB" 10" x 12"
ECDY		19. Brake Power	Cast iron shoes 40,100 lbs. 19.1% GRL Composition shoes 22,428 lbs. 10.2% GRL
5. Underframe - Steel Center Sills	AAR "Z" 41.2 lbs.	20. Automatic Slack Adjuster	Elcon-National Sloan
6. Sides	1/4" steel, 26 side stakes 3/8"-7/16" Pressed Steel	21. Hand Brake	AAR Ajax, Universal, Equipco, Klasing
7. Floors	2-3/8" shiplap oak. Lines 1 to 9; Spine Edge Car Line 9	TRUCKS	(Various) Steps, Front & Rear Seats, Line 8 & 9 (various)
8. Top Reinforcing Angles	4" x 4" x 1/2" x 39'-0" long	22. Frame	A-3 Ride Control ASF, Barber S-2-A Std. Car Truck
9. Ends	Fixed - Dreadnaught 3/8" steel SREMCO	23. Snubbing device	Bolster Friction Block
10. End Reinforcement	5" x 4-1/2" x 7/16" Bulb Angle	24. Brake Levers and Connectors	Schaefer Equip. Co.
11. Side and end ladders	Wine; Floor string. 4. " I, or 4.3" Z	25. Brake Beams	AAR No. 18
12. Lading Band Anchors	Wine	26. Brake Beam Hangers	Flannery
DRAFT		27. Brake Beam Supports & Safety Device	4 point Croco
13. Draft Gear	AAR, Miner, Cardwell-Westinghouse, Edgewater	28. Side Bearings - Roller type single	Stucki
14. Draft Key	AAR Retainer Lock IRECO	29. Axles	AAR 6" x 11", Wheels 1-wear wrot steel 33"
15. Coupler	AAR Type R 6 1/2" x 8" bottom operated	30. Train Length Coupled	571-0-3/4"