


Converted from 5000 - 5059 Covered Hopper

Class HD
 Ballast cars 1564-1599

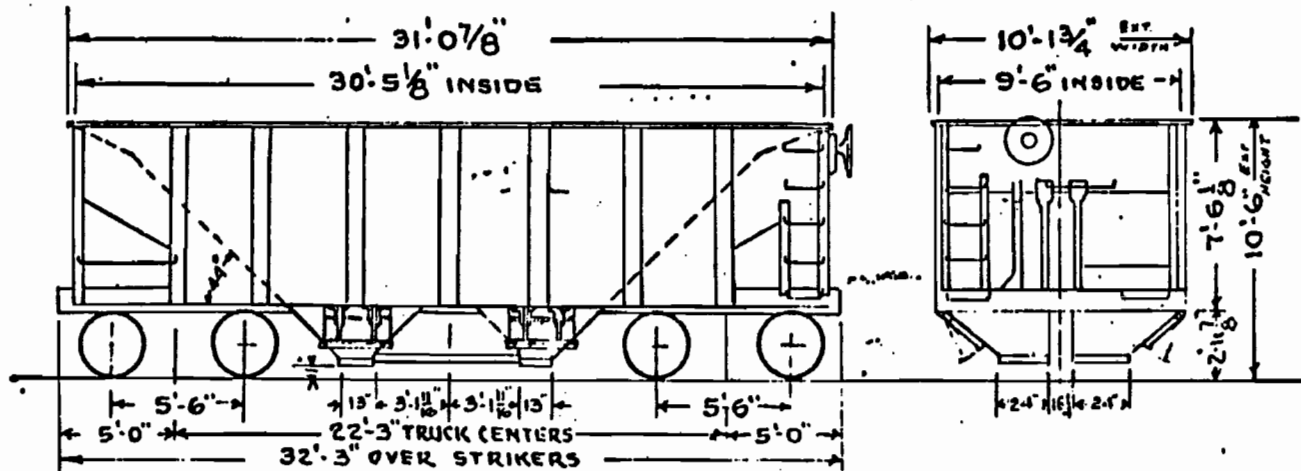

GENERAL		DRAFT (Continued)	
1. Capacity - level	1425 cu.ft.	Nominal	110,000 lbs.
2. Load Limit			124,300 lbs.
3. Light Weight			44,700 lbs.
4. Maximum Load on Rails			169,000 lbs.
BODY		14. Coupler Centering Device	
5. Framing - Underframe Steel	Superstructure Steel	15. Coupler Uncoupling Device	Imperial "B"
6. Floor 1/4" Steel, Sheathing 1/4" Steel St. Pockets	None	AIR BRAKE	
DOORS		16. Brake Schedule	W.A.B. "AP" 10" x 12"
7. Door Operating Device - Center	Enterprise	17. Brake Power	28,744 lbs. 64%
8. Door Opening	Center 4 - 13" x 24"	HAND BRAKE	
	Side 4 - 15" x 24"	18. Operating Device	Ajax 22" wheel
9. Side Door - 1/4" thick	Door Latch WM Shop	TRUCKS	
10. Side Door Chains	20-1" Links, 1/4" dia. Wire	19. Frame	Cast Steel
DRAFT		20. Dead Lever Fulcrum	Wine Brake Palancer
11. Draft Gear	Miner A-22-XE	21. Side Bearing	Stucki
12. Draft Attachments	Farlow two-key	22. Lateral Motion Device	Parber
		23. Snubber	Simplex Unit Type
		24. Axles	A.A.R. 5 1/2" x 10"
		25. Wheels	Cast Iron A.A.R. 33"
		26. Brake Beam Auxiliary Support	Single Economy - Creco
		27. Train Length Coupler	