Built 1951, 1952 Company's Shop

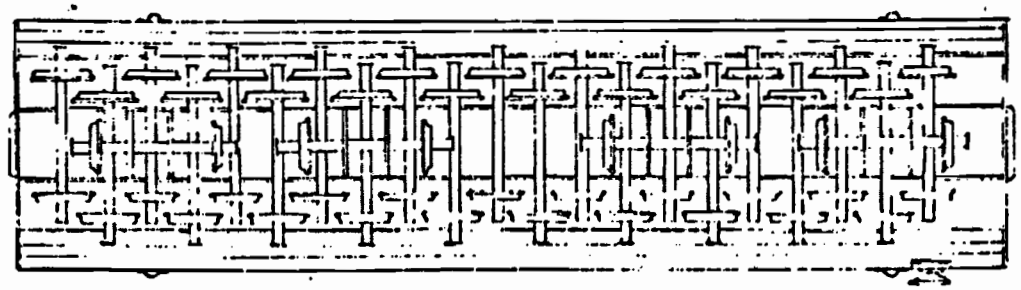

Longitudinal Pairs Secured with 2 Anchors Each

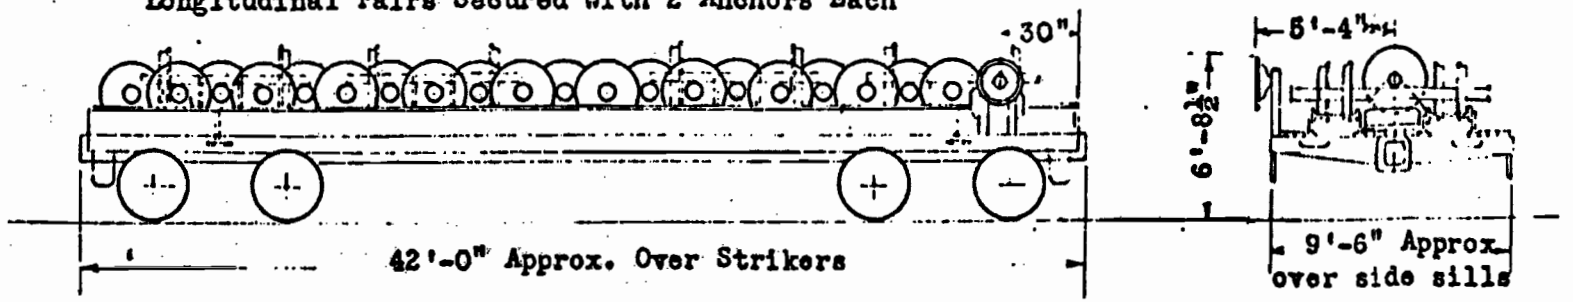

Capacity 80,000 lbs. Maximum Load on Rails 136,000 lbs.

Wheel Cars Nos.	31	32	33	34	35	36	37	38	39	
1. Light Weight	41,100 lbs.	39,300 lbs.	41,500 lbs.	39,300 lbs.	38,500 lbs.	42,100 lbs.	45,700 lbs.	44,200 lbs.	47,100 lbs.	49,2
2. Load Limit	94,900 lbs.	96,700 lbs.	94,500 lbs.	96,700 lbs.	97,500 lbs.	93,900 lbs.	90,300 lbs.	91,800 lbs.	88,900 lbs.	86,8
3. Type Center Sill	AAR"J"40.3#	AAR"Z"36.21	12"Channel	AAR"Z"36.21#	AAR"Z"36.21#	AAR"J"40.3#	Fish belly	12"Channel	AAR"Z"36.21#	12"C
4. Couplers AAR Opr.	Top	Bottom	Bottom	Bottom	Bottom	Top	Bottom	Bottom	Bottom	Bot
5. Yoke	2-Key	2-Key	2-Key	Vertical	Vertical	2-Key	2-Key	Vertical	2-Key	2-K
6. Striker	Plain	Cent.Device	Cent.Device	Cent.Device	Plain	Cent.Device	Plain	Plain	Plain	Pla
7. Draft Gear	Farlow	National	Farlow	Cardwell-Westinghouse	Miner	Symington-Gould	Miner	Cardwell-Westinghouse	Miner	Min
8. Hand Brake	Ajax	Universal	Ajax	Ajax	Ajax	Ajax	Ajax	Ajax	Ajax	Aja
9. Truck - Frame	Integral	Integral	Integral	Integral	Integral	Integral	Andrews	Integral	Integral	Into
10. Jour.Size & Wheels	5½"x10"-33"	5"x9"-33"	5½"x10"-33"	5½"x10"-33"	5½"x10"-33"	5½"x10"-33"	5"x9"-33"	5½"x10"-33"	5½"x10"-33"	5½
11. Location Bottom Rod	Bottom	Center	Bottom	Center	Center	Bottom	Bottom	Bottom	Bottom	Bo
12. Bottom Rod Guard	Creco	None	AAR	None	None	Creco	Creco	Creco	Creco	Cr
13. Brake Beam Support	AAR	Creco 4 Point	AAR	Creco 4 Point	Creco 4 Point	Creco 4 Point	AAR	AAR	Creco 4 Point	A
14. Snubbers (Truck)	Miner	Miner	Miner	Barber	Miner	Cardwell	Miner	Miner	Miner	Mi
15. Side Bearings	Friction	Stucki	Stucki	Stucki	Friction	Stucki	Stucki	Stucki	Friction	Fr
16. Pkg.Retainer Springs	8	8	8	8	8	8	8	8	8	
17. [illegible]	"OB"O'Boyle	Universal	King	Ajax "B"	Ajax "B1"	Westinghouse		[illegible]		