


OBSOLETE 9-30-59

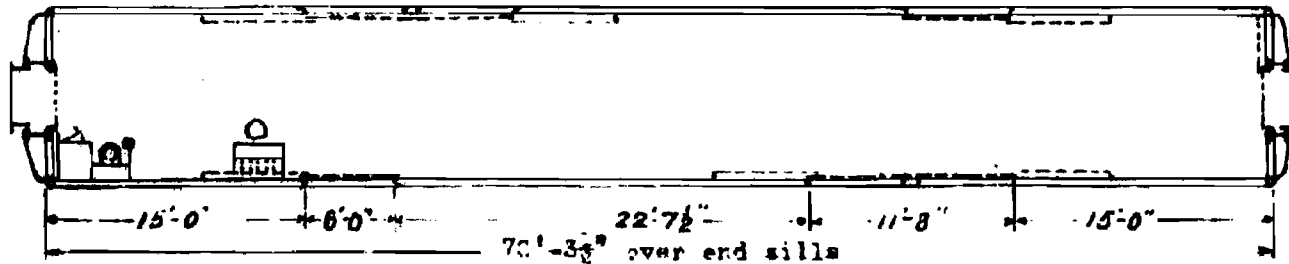

1. GENERAL - Light weight	120,300 lbs.	24. Screens	Upper deck
2. Capacity, Max.	84,000 lbs.	25. GLASS - Lower sash, None	Upper sash, None
3. Length over all, coupled	73' 0"	26. Doors, side 3, 16" CRYSTAL	Mirrors, 1 - 12" x 12"
4. " " end sills	70' 3"	27. SEATS	1 wood chair
5. " " inside	69' 7"	28. Upholstery	None
6. " " between truck centers	62' 3"	29. WATER - Supply, None	Coolers, 1 gal. steel
7. " " truck wheel base	11' 0"	30. HEATING - System, Chicago	Type, Vapor
8. Width over all, at eaves	10' 2"	31. LIGHTING - System, U.S.L.	Batteries, Edison
9. " " inside	9' 1"	32. MAIL - Apartment	None
10. Height, track to roof at center	13' 5 1/2"	33. BRAKES - Power 102,050 lbs., 85%	Schedule, LN-1612
11. " " " eaves	10' 11 1/2"	34. TRUCKS - Frames	Cast steel
12. Highest point of car, roof	13' 8 1/2"	35. Side bearings	Stucki
13. BODY - Underframe, steel	Superstructure, steel	36. Axles	A.R.A. 5" x 9"
14. Sheathing, 1/8" steel plate	Roof, steel	37. Journal boxes	A.R.A. 6" x 9"
15. Insulation	Salamander	38. Wheels, per truck	6 - 36" steel
16. Inside finish	Corrugated Steel	39. Brakes	A.B.Co. Clasp
17. Flooring	Double - Yellow pine & Maple		
18. Ventilators	Deck sash		
19. COUPLERS, Pitt	Draw Bar, Single stan.		
20. Draft gear, Westinghouse D-3	Buffer, Pullman spring		
21. Trap doors	None		
22. WINDOWS - Sash	None		
23. Shades	None	* See list of lighting equipment	