


Note:- Underframe provided with Commonwealth cast steel combined bolster and platform, in connection with Commonwealth cast steel Anti-Telescoping ends and crossbeams. Bolsters connected by two 10" 49 lb. steel "H" columns.

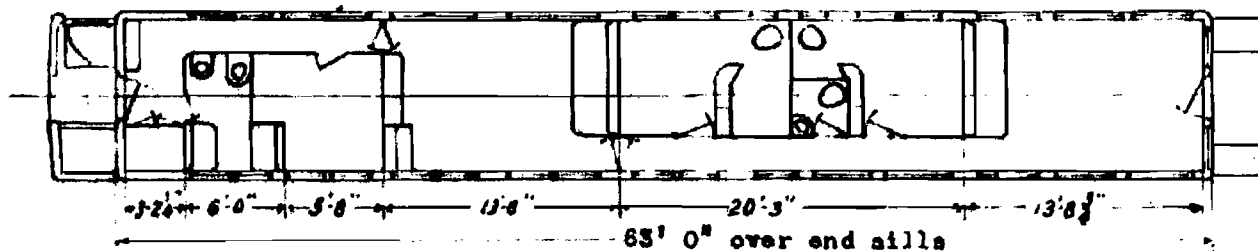

1. GENERAL - Light Weight	130,700 lbs.	24. Screens	Windows & Doors
2. Capacity	20 Passengers	25. GLASS - Lower sash 3/16" crystal, Upper, 3/16" crystal	
3. Length over all, coupled	71' 0"	26. Doors, 1/4" Plate	Mirrors, Four
4. " " end sills	63' 0"	27. SEATS - Make, A.C. & F.	Type, Miscellaneous
5. " " inside	61' 7"	28. Upholstery - Material, Leather	Style, Spanish
6. " " between truck centers	46' 9"	29. WATER - Supply, Gravity	Coolers, None
7. " " truck wheel base	10' 6"	30. HEATING - System, Cold	Type, Direct
8. Width over all, at eaves	10' 0 1/2"	31. -LIGHTING - System, Stone	Batteries, U.S.L.
9. " " inside	8' 7 1/2"	32. MAIL - Apartment	None
10. Height, track to roof at center	13' 6"	33. BRAKES - Power 124,100 lbs. 94% Schedule, FM-1612	
11. " " " eaves	11' 3"	34. TRUCKS - Frames	Oak
12. Highest point of car, stove pipe	15' 2"	35. Side bearings	Plain
13. BODY - Underframe, Wood	Superstructure, Wood	36. Axles	A.R.A. 4 1/2" x 8"
14. Sheathing, Poplar	Roof, #8 Canvas	37. Journal boxes	A.R.A. 4 1/2" x 8"
15. Insulation	None	38. Wheels, per truck	8 - 33" Steel
16. Inside finish	Mahogany	39. Brake beams	High speed Special - 28,000 lbs.
17. Flooring	Double Yellow Pine		
18. Ventilators	Garland		
19. COUPLERS, Janney	Draw Bar, 3-Stub		
20. Draft gear, Two 6 1/2" x 6" springs, Buffer, Miner B-6			
21. Trap doors	National		
22. WINDOWS - Sash, Double	Fixtures, A. & W.		
23. Shades - Material, Linen	Fixtures, #84 Forsythe		