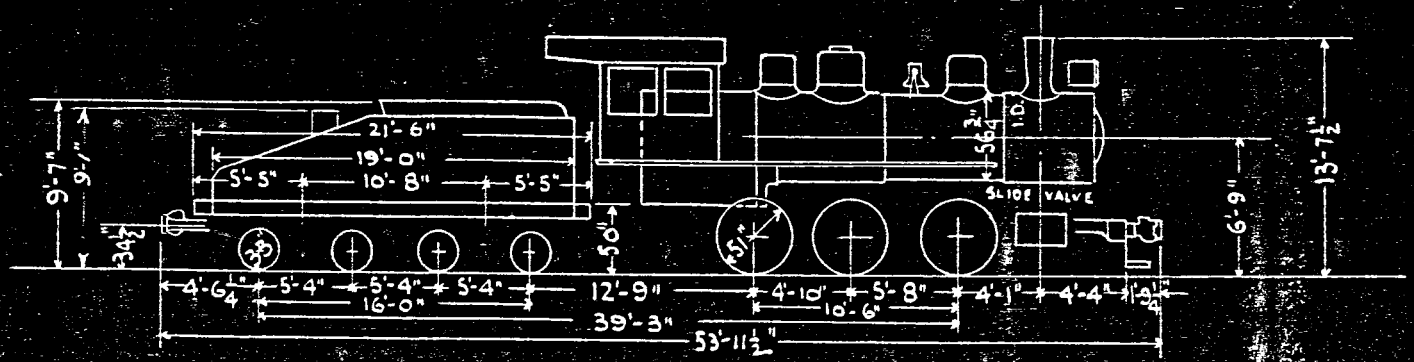


## CLASS B-2

ENGS. NOS. 2104-2106

| | | | | | |
|---|---|---|---|---|---|
| CYLINDERS | 18 x 24" | DRIVER AXLE JOUR-MAIN | 7 x 9 | GRATE AREA INTO H.S. | 95.5 |
| DIA. DRIVERS | 51" | " " " | " | CYL. VOLUME " H.S. | 205.6 |
| STEAM PRESSURE | 165 LBS | TENDER " " | 9¼ x 8 | " " " G.A. | 2.15 |
| TUBES - NUMBER | 193-2" O.D. | TRACTIVE FORCE | 21388 LBS | STEAM HEAT - NO | |
| " - LENGTH | 13'-3" | WT. ON DRIVERS | 107500 " | ELECTRIC HEADLIGHT - YES | |
| HEATING SURFACE - TUBES | 1339 Sq Ft | " ENG. WORKING ORDER | " " | | |
| " " - FIREBOX | 113 " | " TENDER LOADED | 71500 " | | |
| " " - TOTAL | 1452 " | " ENG-TENDER LIGHT | 126200 " | | |
| FIREBOX - SIZE | 63½ x 34½ | TENDER CAPY - WATER | 3500 GAL | | |
| GRATE AREA | 15.2 Sq Ft | " " - COAL | 5.5 TON | | |