


Built December 1968, Fruit Growers Express Company  
 Spec. No. S-300, dated 10-17-68, Rev. 11-4-68  
 B.M. No. BM-752

WM System Classification B-32

Insulated Box Cars, Nos. 36021-36035  
 Class RBL

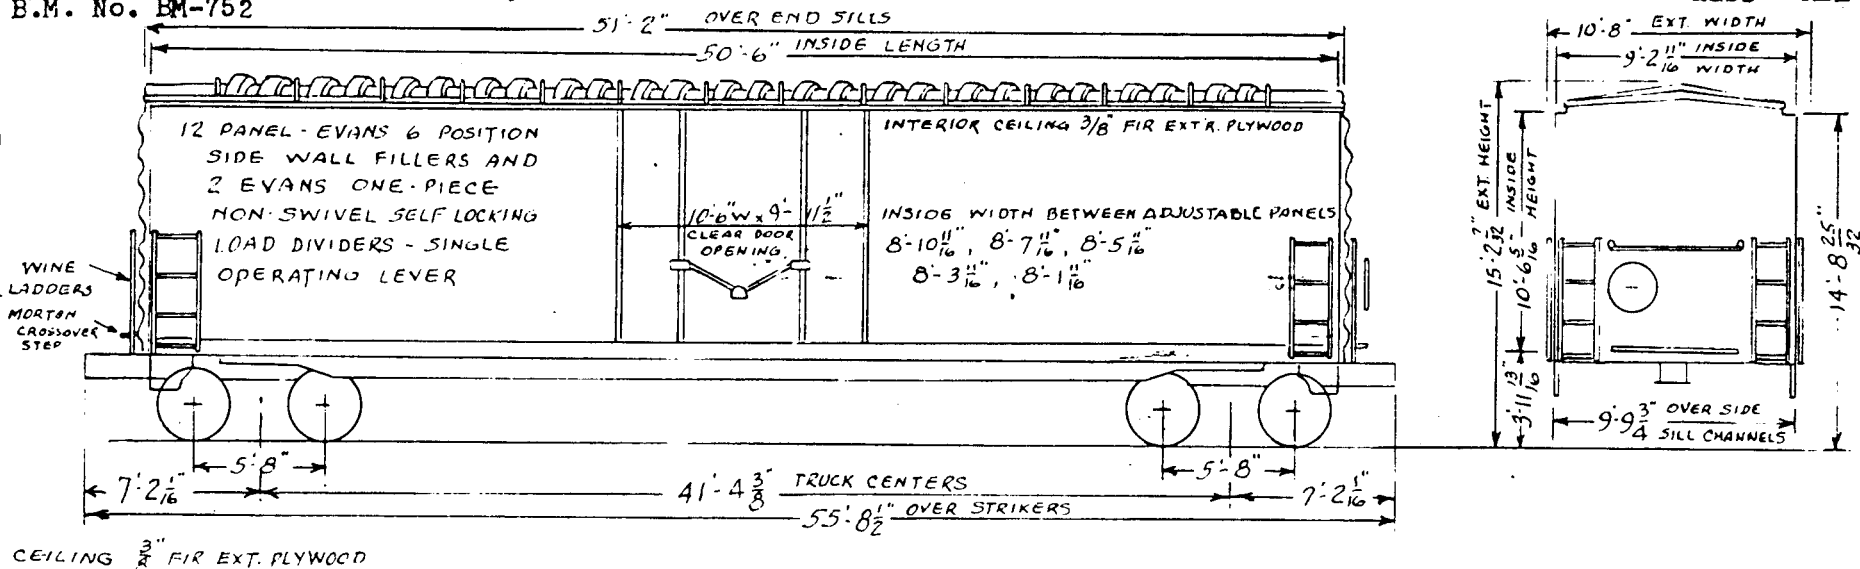

CEILING 3/8" FIR EXT. PLYWOOD

GENERAL		DRAFT - Cushion Device 20" travel		Keystone	
1. Capacity - Level 4903 cu.ft.	Nominal 136,000 lbs.	17. Draft Gear A-22-XL, Miner;	Yoke AAR BY-40		
2. Load Limit	136,800 lbs.	18. Coupler AAR B-E60A-HT, Uncoupling Device S.R.E. Co.			
3. Light Weight	83,200 lbs.	BRAKES			
4. Maximum Load on Rails	220,000 lbs.	19. Brake Schedule Wabco ABD-1012, 7 1/2" cyl. conversion kit			
BODY		20. Brake Shoes	Cobra V-139 2"	Wabco	
5. Sides .10 CB, Side Sills 4"x6"x1/2" angle, Reinf. 12'-25" channel		21. Brake Power	10.2% Gross Rail Load		
6. Doors Slid. Plug Type, Insul. 10'6"x9'11 1/2" high	Youngstown	22. Hand Brakes	Model 2000 Slack Adjuster Ell.-Nat'l		
7. Insulation Polyurethane, Floor 2 1/2", Sides 2 3/4", Ends 2 3/4", Roof 3", Doors 2 1/16"		TRUCKS 6" x 11" Barber S-2-C	3-11/16" travel		
8. Floor 2 1/4" untreated laminated panel, Sub-floor 5/8" plywood		23. Frames	Narrow Pedestal Type - Unit Buckeye		
9. Floor Stringers 2 - 3" I @ 5.7#/ft., 1-3" Z @ 6.7#/ft. ea. side		24. Brake Levers and Connectors	Schaefer		
10. Roof 15 USS gage CB steel, Galvanized	S.R.E.Co.	25. Brake Beams #18 Unit Truck; Brake Pins Type F Excello			
11. Ends Bottom Section 1/4", Top Section 3/16"	S.R.E.Co.	26. Side Bearings	Single Roller No. 656-C Stucki		
12. Side Lining 2 5/8" x 5 3/16" T & G Fir, 3/4" Fir Plywood, End Lining 1 1/4" x 5 1/4" T & G		27. Roller Bearings with grease fittings	Brenco		
13. Side Wall Fillers 6-position type, 12 per car	Evans	28. Snubbers S-2-C Bolster Friction Blocks Std. Car Truck			
14. Bulkheads one pc. non-swivel Type DF-B steel	Evans	29. Wheels AAR R-33 Class U	Multiple Wear 33"		
15. Heater Hanger Supports 2 per car	Car Builder	30. Axles 6"x11", AAR D-11, M-126, Grade F	N & T		
16. Sliding Sill AAR Zee 4L.2# H.T. Fixed sill 13" 3L.8# Chan.		31. Train Length Coupled	58'-4"		